


24Volt SERIES *Terminals*

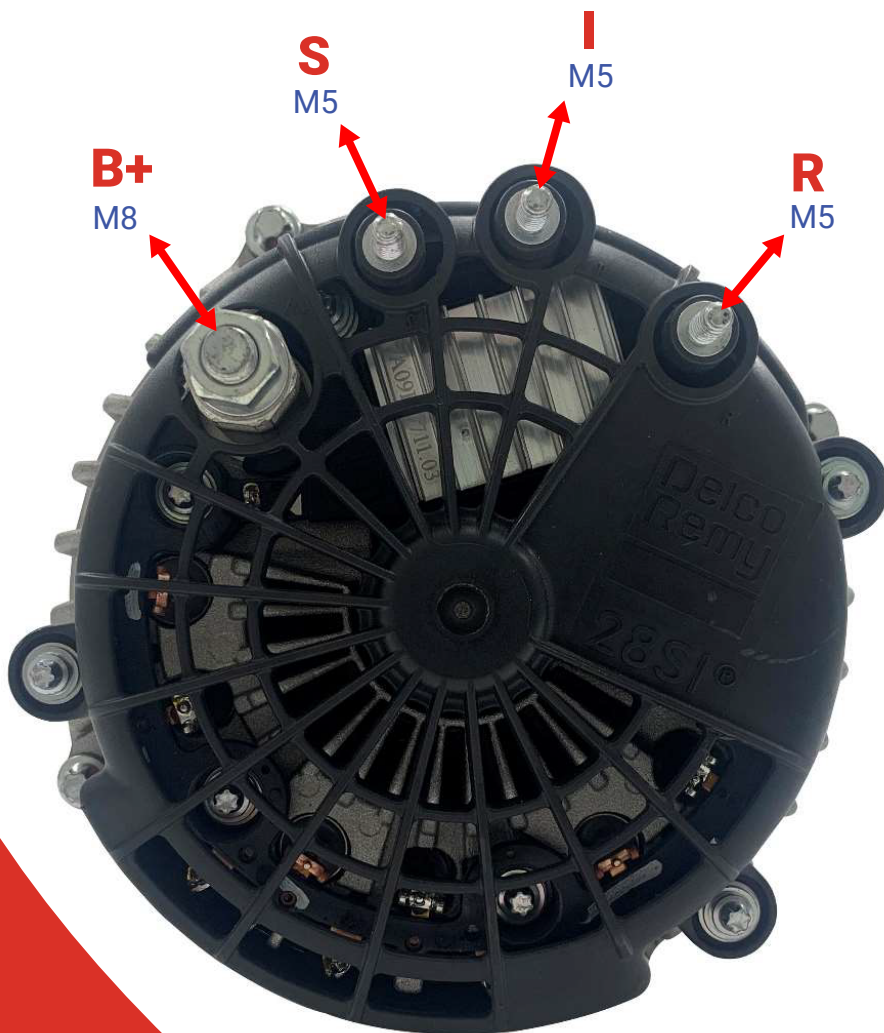

Required:

- B+** Battery (+)
M8 80-120 lb in (9.0-13.0 Nm)

Optional:

- S** Remote Sense
M5 27-44 lb in (3.0-5.0 Nm)
- I** Indicator / Ignition
M5 27-44 lb in (3.0-5.0 Nm)
- R** Relay
M5 27-44 lb in (3.0-5.0 Nm)

Note:

The alternator Ground (-) connection is made via the alternator's front mounting points. If the mounting surface does not provide an adequate ground you will need to run a dedicated connection from the alternator mount to a chassis ground.